



SWITCHING DIODES

Voltage

100 V

Power

500 mW

Features


- Fast Switching Speed
- Electrically Identical to Standerd JEDEC
- High Conductance
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case: Molded Glass DO-34
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.09 grams
- Packing information

B - 2K per Bulk box T/R - 10K per 15" plastic Reel

T/B - 5K per horiz. tape & Ammo box

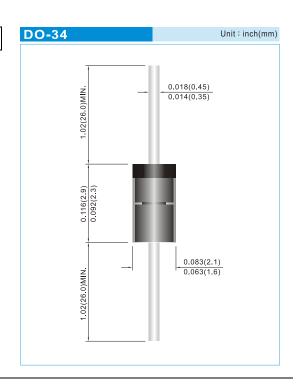

Maximum Ratings (T_A=25°C unless otherwise noted)

| PARAMETER | SYMBOL | VALUE | UNIT |
|--|----------|---------------|----------------|
| Peak Reverse Voltage | VRM | 100 | V |
| Surge Forward Current at t<1s and T _J =25°C | IFSM | 500 | mA |
| Power Dissipation at T _A =25°C | Ртот | 500 | mW |
| Forward Continuous current | lF | 300 | mA |
| Maximum Forward Voltage at I=10mA | VF | 1 | V |
| Maximum Leakage Current at VR=20V at VR=75V at VR=20V, TJ=150°C | lr | 25 5 50 | nA μA μA |
| Maximum Capacitance at V _F =V _R =0 | CJ | 4 | pF |
| Maximum Reverse Recovery Time From IF=-IR=10mA to IRR=-1mA, VR=6V, RL=100Ω | Trr | 4 | ns |
| Typical Thermal Resistance | Reja | 300 | °C/W |
| Junction Temperature And Storage Temperature Range | TJ, TSTG | -65 to +175 | °C |

Note: 1.CJ at VR=0,f=1MHz

2. From IF=10mA to IR=1mA, VR=6V, RL=100 Ω

August 4,2017-REV.10 Page 1





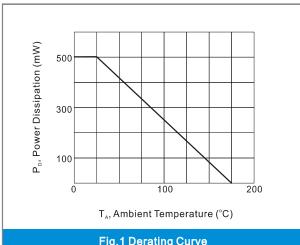


Fig.1 Derating Curve

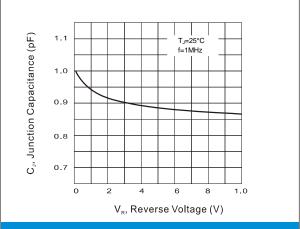


Fig.2 Typical Junction Capacitance

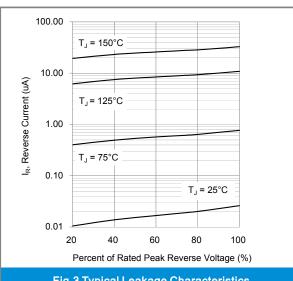


Fig.3 Typical Leakage Characteristics


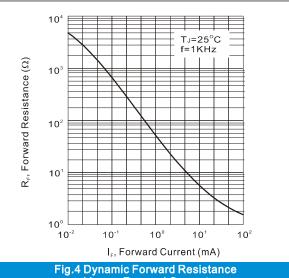


Fig.4 Dynamic Forward Resistance Versus Forward Current

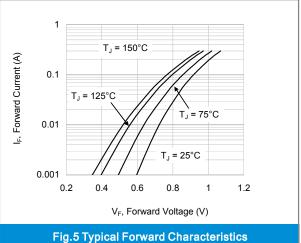

August 4,2017-REV.10 Page 2





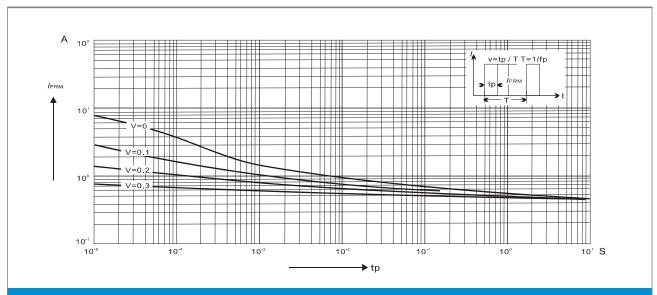


Fig.6 Admissible Repetitive Peak Forward Current Versus Pulse Duration

August 4,2017-REV.10 Page 3





Part No_packing code_Version


1N4148-34_AX_10001

1N4148-34_AY_10001

1N4148-34_B0_10001

1N4148-34_R2_10001

For example:

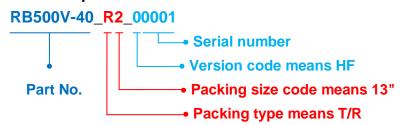

| Packing Code XX | | | Version Code XXXXX | | | |
|--|-------------------------|-------------------------------------|-------------------------|---------------|-------------------------|--|
| Packing type | 1 st Code | Packing size code | 2 nd Code | HF or RoHS | 1 st Code | 2 nd ~5 th Code |
| Tape and Ammunition Box (T/B) | A | N/A | 0 | HF | 0 | serial number |
| Tape and Reel (T/R) | R | 7" | 1 | RoHS | 1 | serial number |
| Bulk Packing (B/P) | В | 13" | 2 | | | |
| Tube Packing (T/P) | Т | 26mm | X | | | |
| Tape and Reel (Right Oriented) (TRR) | S | 52mm | Y | | | |
| Tape and Reel (Left Oriented) (TRL) | L | PANASERT T/B CATHODE UP (PBCU) | U | | | |
| FORMING | F | PANASERT T/B CATHODE DOWN (PBCD) | D | | | |

August 4,2017-REV.10 Page 4





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are
 responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no
 representation or warranty that such applications will be suitable for the specified use without further testing or
 modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

August 4,2017-REV.10 Page 5